




BM2 HYDRAULIC MOTOR

Dimensions - inches (mm)

Standard Port

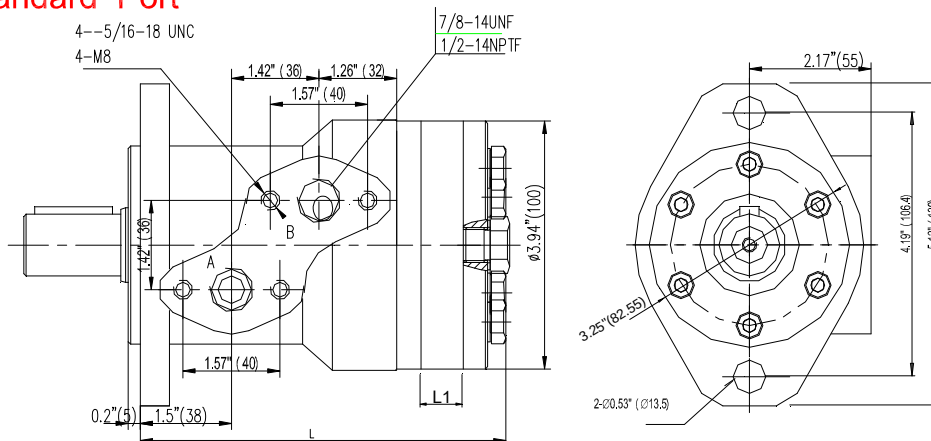

Horizontal Port

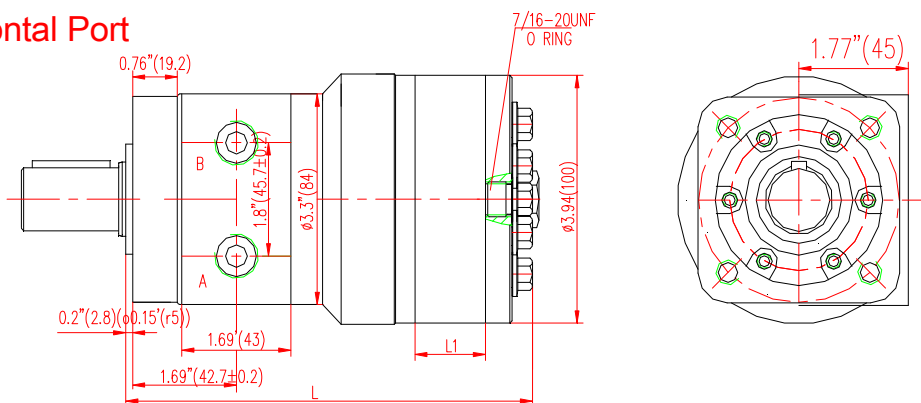


Shaft Load Capacity:
Radial Load: 882 lb (400Kg) Max.
Axis Load: 441lb (200Kg) Max.

in ³ /r	3.05	3.84	4.88	6.10	7.63	9.76	12.2	15.25	19.22	24.41	30.5
Displ. (ml/r)	50	63	80	100	125	160	200	250	315	400	500
L (inch)	5.74	5.87	5.98	6.10	6.30	6.54	6.85	7.20	7.64	8.23	8.94
mm	146	149	152	155	160	166	174	183	194	209	227
L 1 (inch)	0.35	0.44	0.57	0.7	0.91	1.14	1.46	1.81	2.24	2.83	3.54
mm	9	11.3	14.5	17.8	23	29	37	46	57	72	90

BM2 HYDRAULIC MOTOR

BM2W Wheel Motor

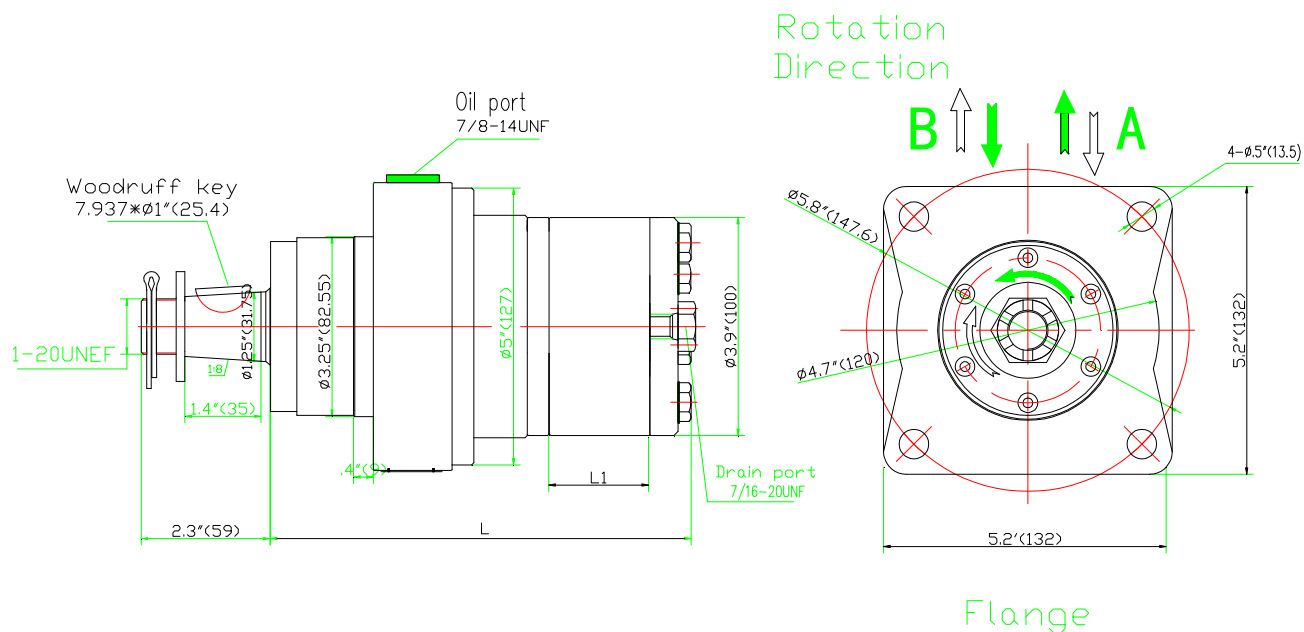

in ³ /r	3.05	3.84	4.88	6.10	7.63	9.76	12.2	15.25	19.22	24.41	30.5
Displ. (ml/r)	50	63	80	100	125	160	200	250	315	400	500
L (inch)	6.18	6.3	6.41	6.5	6.7	6.97	7.28	7.64	8.07	8.66	9.37
mm	157	160	163	166	171	177	185	194	205	220	238
L 1 (inch)	0.35	0.44	0.57	0.7	0.91	1.14	1.46	1.81	2.24	2.83	3.54
mm	9	11.3	14.5	17.8	23	29	37	46	57	72	90

BM2 HYDRAULIC MOTOR

Mounting flange dimensions and codes - inches (mm)

