


## HMM HYDRAULIC MOTOR

HMM Ordering Code:

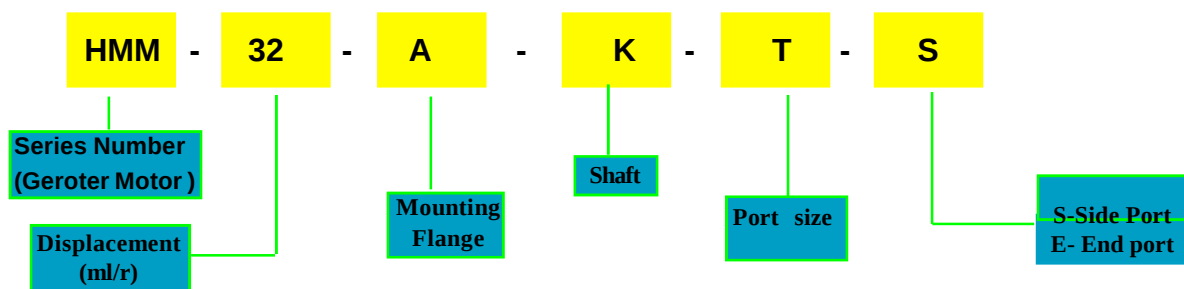

Codes Specification

| DISPL. (ml/r)                                            | MOUNTING FLANGE |                                                                                               | SHAFT (KEY)<br>(mm) |                                                |                            | PORT SIZES |                |                 |
|----------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------|---------------------|------------------------------------------------|----------------------------|------------|----------------|-----------------|
| 8<br>*<br>12<br>*<br>20<br>*<br>32<br>*<br>40<br>*<br>50 | A               | 3 Bolt Flange Pilot $\Phi 1.24"$ (31.5mm) bolt 3x $\Phi 0.25"$ pos. $\Phi 1.77"$ (45mm)       | M                   | (Metric) KEY<br>SHAFT $\Phi 0.63"$ (16 mm)     | KEY 0.2" X0.65" (5x16.5mm) | C          | 2XG9/16"-18UNF | Drain<br>G 3/8" |
|                                                          | B               | 2 Bolt Flange Pilot $\Phi 2.5"$ (63.8mm) Bolt 2- $\Phi 0.35"$ (9mm), pos. $\Phi 3.15"$ (80mm) | K                   | (US Imperial) KEY<br>SHAFT $\Phi 0.63"$ (16mm) | KEY 0.2" X0.76" (5x19.4mm) | Q          | 2XG3/8"        | Drain<br>G 1/8" |
|                                                          | C               | 3 Bolt Flange Pilot $\Phi 1.24"$ (31.5mm) bolt 3xM6 pos. $\Phi 1.77"$ (45mm) (Metric bolts)   | S                   | SPLINED SHAFT                                  | 9 Tooth B17x14<br>DIN 5482 | S          | Side port      |                 |
|                                                          |                 |                                                                                               |                     |                                                |                            | E          | End port       |                 |

Order coding: for example, HMM-32-A-K-C-S, which Motor is 1.93 in<sup>3</sup>/r (32 ml/r) displacement, 3 bolts flange 1.24" (31.5mm) Dia. key shaft 0.63" Dia. G9/16" port, with side port.

HMM Optional Valve Ordering Code:

