



Features

- High Operating Pressure
(Maximum 2500 PSI)
- High Speed (Maximum 2400 RPM)
- 2- or 3-Line Installations
- Choice of Actuators
(Air remote and Manual controls)
- Relief Valve protection
- Interchangeable With
O.E.M' Parts

C101/C102 Pump/Valve

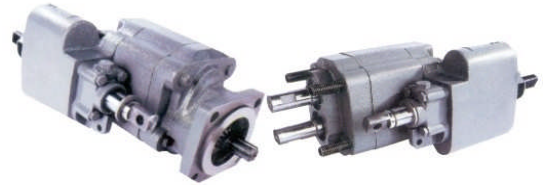

SINGLE PUMP ORDERING SPECIFICATION:



1- C101-Remote Mount
C102-Direct Mount


2- Displacements:
20- 5.10 in³/rev (83.6 cm³/rev)
25- 6.38 in³/rev (104.5 cm³/rev)

3- R- Right rotation(CW)
L- Left rotation (CCW)

4- 2 - 2-line installation
3 - 3-line installation

5- A-Air remote control
M-Manual control

C101/C102 PERFORMANCE CURVES

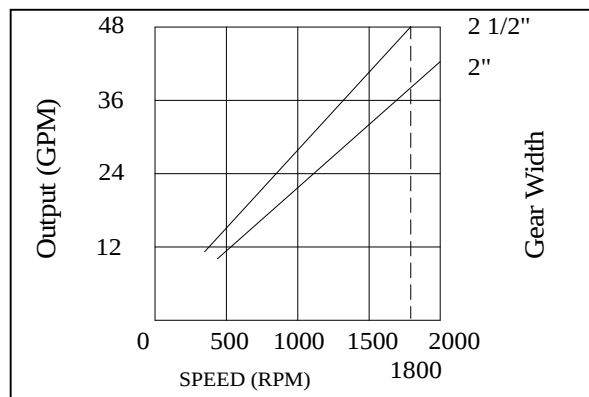

Model	Gear Width	Displacement	Maximum	Maximum	Weight
Series	in.	in ³ /r(cm ³ /r)	Speed (RPM)	Pressure(PSI)	lb(kg)
C101	2	5.10(83.6)	2400	2500	66(30)
	2.5	6.83(104.5)			69(31.4)
C102	2	5.10(83.6)			68(30.9)
	2.5	6.83(104.5)			71(32.3)