

Introduction

Piston Pumps & Motors PVB5...PVB29 & MFB5...MFB29 series


Features

- High Performance
- High Efficiency
- Various Manual and Compensating Controls
- Quiet Operation
- Hydraulic Balance
- Interchangeable with Vickers' Parts

PVB5/6/10/15 PVB20/29



MFB5/10 MFB20/29

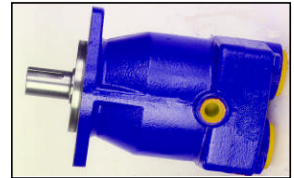

WH SINGLE PUMP ORDERING SPECIFICATION:

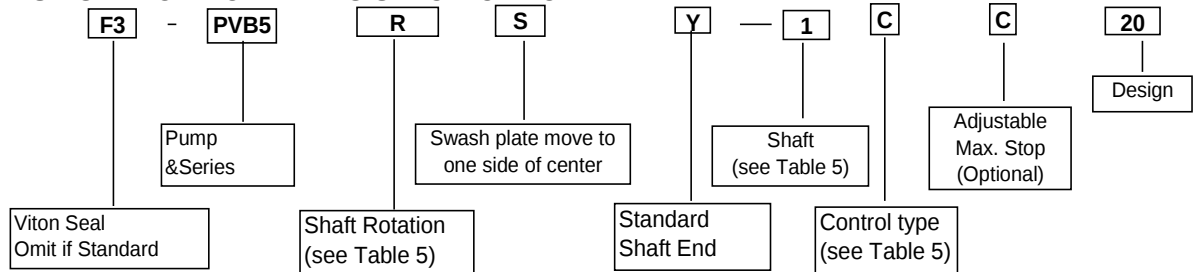


Table 5 Piston Pumps

Pump & Series	Flow rating @1800rpm	Shaft Rotation (view from shaft head)	Shaft	Control Type	Connection Inlet & Outlet Ports
PVB5	5	L- left hand (counterclockwise) Omit for right hand	1-str.keyed 11-spline	Pressure Compensator	11/16"-12 UNF-2B thread for SAE O-ring fittings
PVB6	6			C - 250-3000 psi	
PVB10	10			CM - 250-1500 psi	1.625"-12 UNF-2B thread for SAE O-ring fittings
PVB15	15			CVP - Pressure limiter load sensing	
PVB20	20			M - Level	
PVB29	29		1-str.keyed	CG - Remotely adjustable Pressure setting	2.0" with 4-bolts flange of .500-13 UNC 2B thread
PVB45	45				

WH SINGLE MOTOR ORDERING SPECIFICATION:

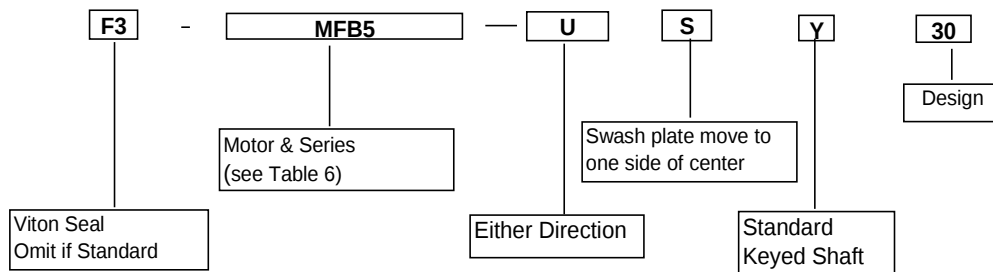


Table 6 Piston Motors

Motor & Series	Flow rating @1800rpm gpm	Connection Inlet & Outlet Ports
MFB5	5	1.062-12 UN-2B Thread (For .750 O. D. tubing)
MFB10	10	1.625-12 UN-2B thread (For 1.25 O. D. tubing)
MFB20	20	
MFB29	29	